

(10) **Patent No.:** US 9,325,865 B2
(45) **Date of Patent:** Apr. 26, 2016

(54) **IMAGING APPARATUS, METHOD OF CONTROLLING IMAGING APPARATUS, AND PROGRAM**

(71) Applicant: **CANON KABUSHIKI KAISHA,**
Tokyo (JP)

(72) Inventor: **Satoshi Watanabe**, Tokyo (JP)

(73) Assignee: **CANON KABUSHIKI KAISHA,**
Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 85 days.

(21) Appl. No.: 14/328,601

(22) Filed: **Jul. 10, 2014**

(65) **Prior Publication Data**

US 2015/0015726 A1 Jan. 15, 2015

(30) **Foreign Application Priority Data**

Jul. 12, 2013 (JP) 2013-146869

(51) **Int. Cl.**
H04N 1/00 (2006.01)
H04N 5/77 (2006.01)
H04N 5/232 (2006.01)
H04N 5/235 (2006.01)

(52) **U.S. CI.**
CPC *H04N 1/00278* (2013.01); *H04N 5/2355*
(2013.01); *H04N 5/2356* (2013.01); *H04N*
5/23206 (2013.01); *H04N 5/23245* (2013.01);
H04N 5/77 (2013.01); *H04N 5/772* (2013.01)

(58) **Field of Classification Search**

None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,687,302	A *	11/1997	Kawase	G06F 3/12 358/1.13
6,046,769	A *	4/2000	Ikeda	H04N 5/232 348/211.99
7,424,200	B2 *	9/2008	Nishijima	G11B 21/106 386/239
8,009,220	B2 *	8/2011	Kogusuri	H04N 1/00204 348/207.1
8,079,053	B2 *	12/2011	Yampanis	H04N 7/17327 725/100
8,103,839	B2 *	1/2012	Takatsuka	G11B 27/034 711/154
8,421,886	B2 *	4/2013	Tsuda	H04N 1/2112 348/231.9
8,521,692	B1 *	8/2013	Ogata	G06F 11/1458 707/614
9,025,935	B2 *	5/2015	Ishihara	G11B 27/034 386/278
9,058,148	B2 *	6/2015	Taniguchi	G06F 3/1296
9,064,324	B2 *	6/2015	Ooguni	G06T 1/20
9,088,761	B2 *	7/2015	Chang	H04N 5/772

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2001-320626 A 11/2001



Primary Examiner — Michael Osinski

(74) *Attorney, Agent, or Firm* — Carter, DeLuca, Farrell & Schmidt, LLP

(57) **ABSTRACT**

In an imaging apparatus, when a user selects a smart phone mode while a communication function menu screen is displayed, a control unit controls a communication unit to perform a connection operation to an information processing apparatus such as a smart phone. If the user selects a printer mode while the communication function menu screen is displayed, the apparatus determines the current photographing mode. If the current photographing mode is a specific photographing mode, the apparatus displays a printer connection disabled screen to inhibit connection with the printer.

8 Claims, 6 Drawing Sheets

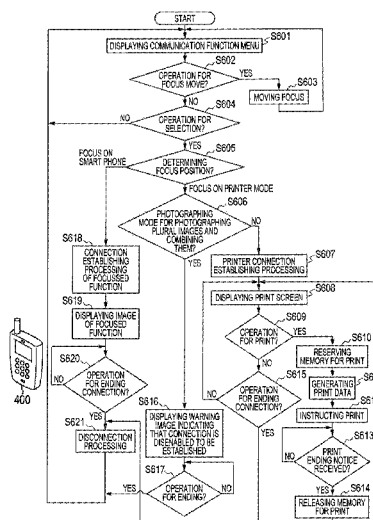

(56)

References Cited

U.S. PATENT DOCUMENTS

2001/0030692	A1 *	10/2001	Yoneda	H04N 1/0044	348/207.99	2008/0260294	A1 *	10/2008	Ogata	G11B 27/034
2002/0018054	A1 *	2/2002	Tojima	G09G 5/393	345/204	2009/0073490	A1 *	3/2009	Kawata	G06F 3/1203
2002/0051065	A1 *	5/2002	Takahashi	H04N 1/32101	348/231.6	2009/0262201	A1 *	10/2009	Kuwata	H04N 1/21
2002/0118894	A1 *	8/2002	Morimoto	H04N 5/335	382/305	2009/0274365	A1 *	11/2009	Tsuda	G06T 3/4007
2003/0077064	A1 *	4/2003	Katayama	H04N 1/00137	386/224	2010/0194765	A1 *	8/2010	Nakamura	G06F 3/14
2004/0047002	A1 *	3/2004	Nishi	G06K 15/00	358/1.18	2011/0292439	A1 *	12/2011	Nagata	H04N 1/00864
2004/0100565	A1 *	5/2004	Chen	G06T 3/4038	348/229.1	2011/0309921	A1 *	12/2011	Tachibana	H04B 7/14
2005/0270579	A1 *	12/2005	Hibi et al.	H04N 1/00384	358/1.16	2012/0031968	A1 *	2/2012	Ohsugi	B41J 3/44
2006/0274971	A1 *	12/2006	Kumazawa	G06K 9/00993	382/276	2012/0191601	A1 *	7/2012	Yoshida	G06Q 20/102
2007/0159652	A1 *	7/2007	Sato	H04N 1/00222	358/1.15	2012/0206470	A1 *	8/2012	Frank	H04N 1/4078
2007/0171916	A1 *	7/2007	Matsutani	H04L 47/10	370/395.42	2014/0106804	A1 *	4/2014	Sakamoto	H04W 76/02
2008/0180551	A1 *	7/2008	Koike	G09G 5/006	348/231.99	2014/0198331	A1 *	7/2014	Bin	G06F 9/4418
							2014/0372390	A1 *	12/2014	Matsuzawa	G06F 17/3028
							2015/0036734	A1 *	2/2015	Hendry	H04N 19/85
												375/240.02

* cited by examiner

FIG. 1

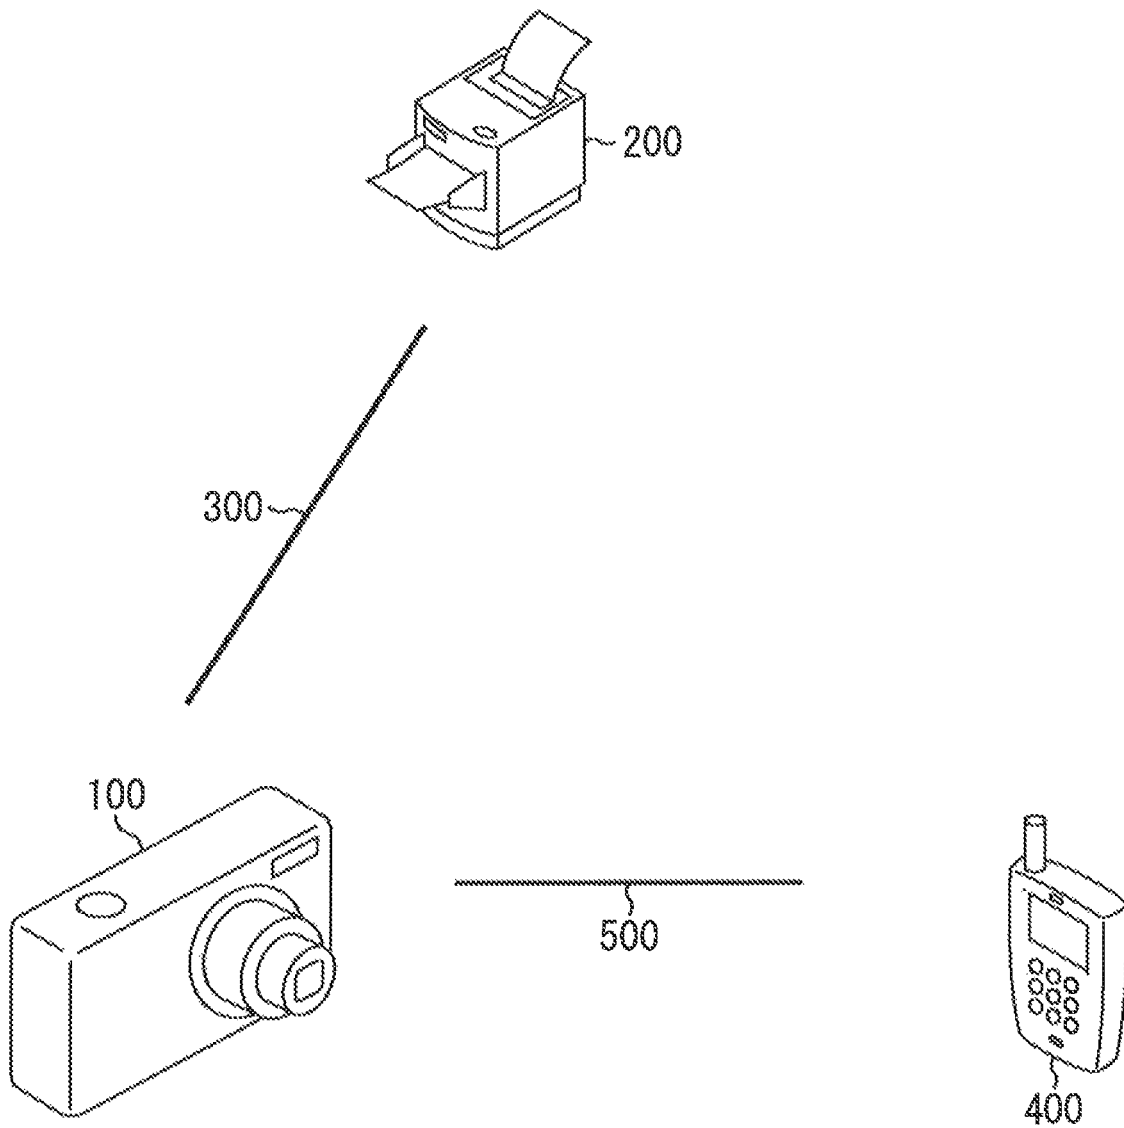


FIG. 2

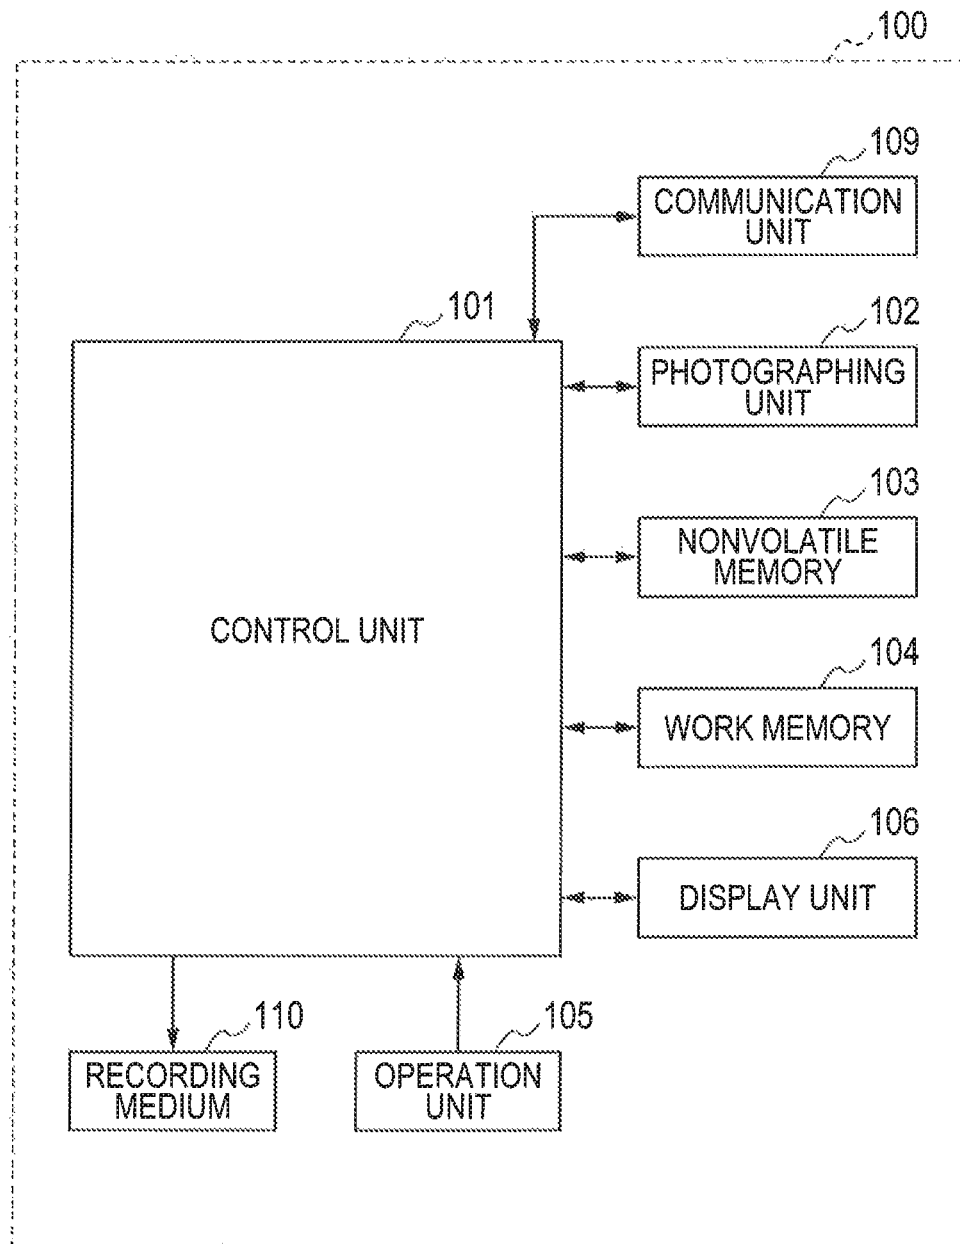


FIG. 3

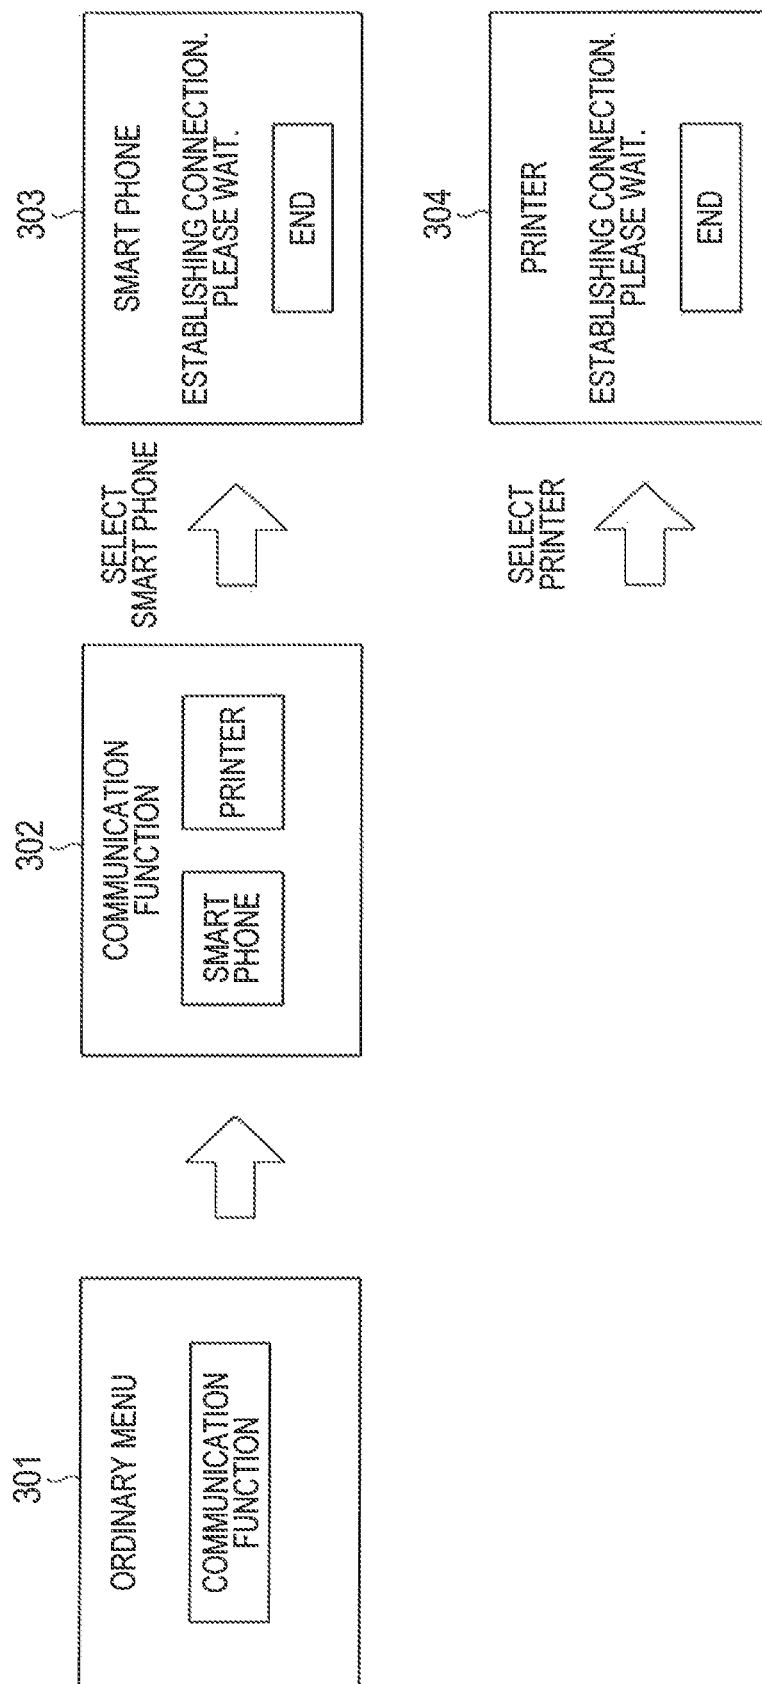


FIG. 4

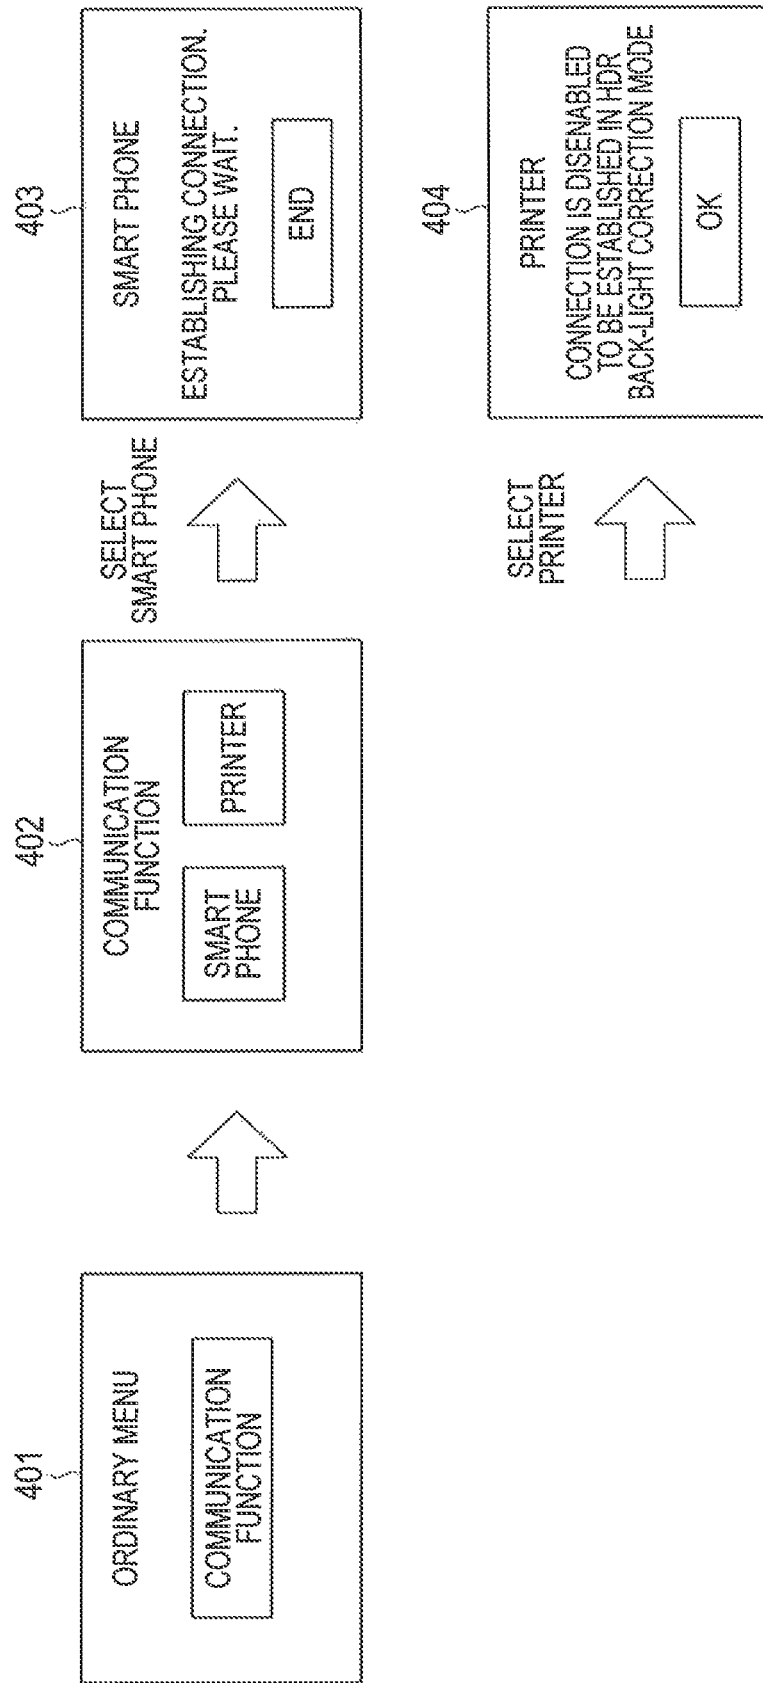


FIG. 5


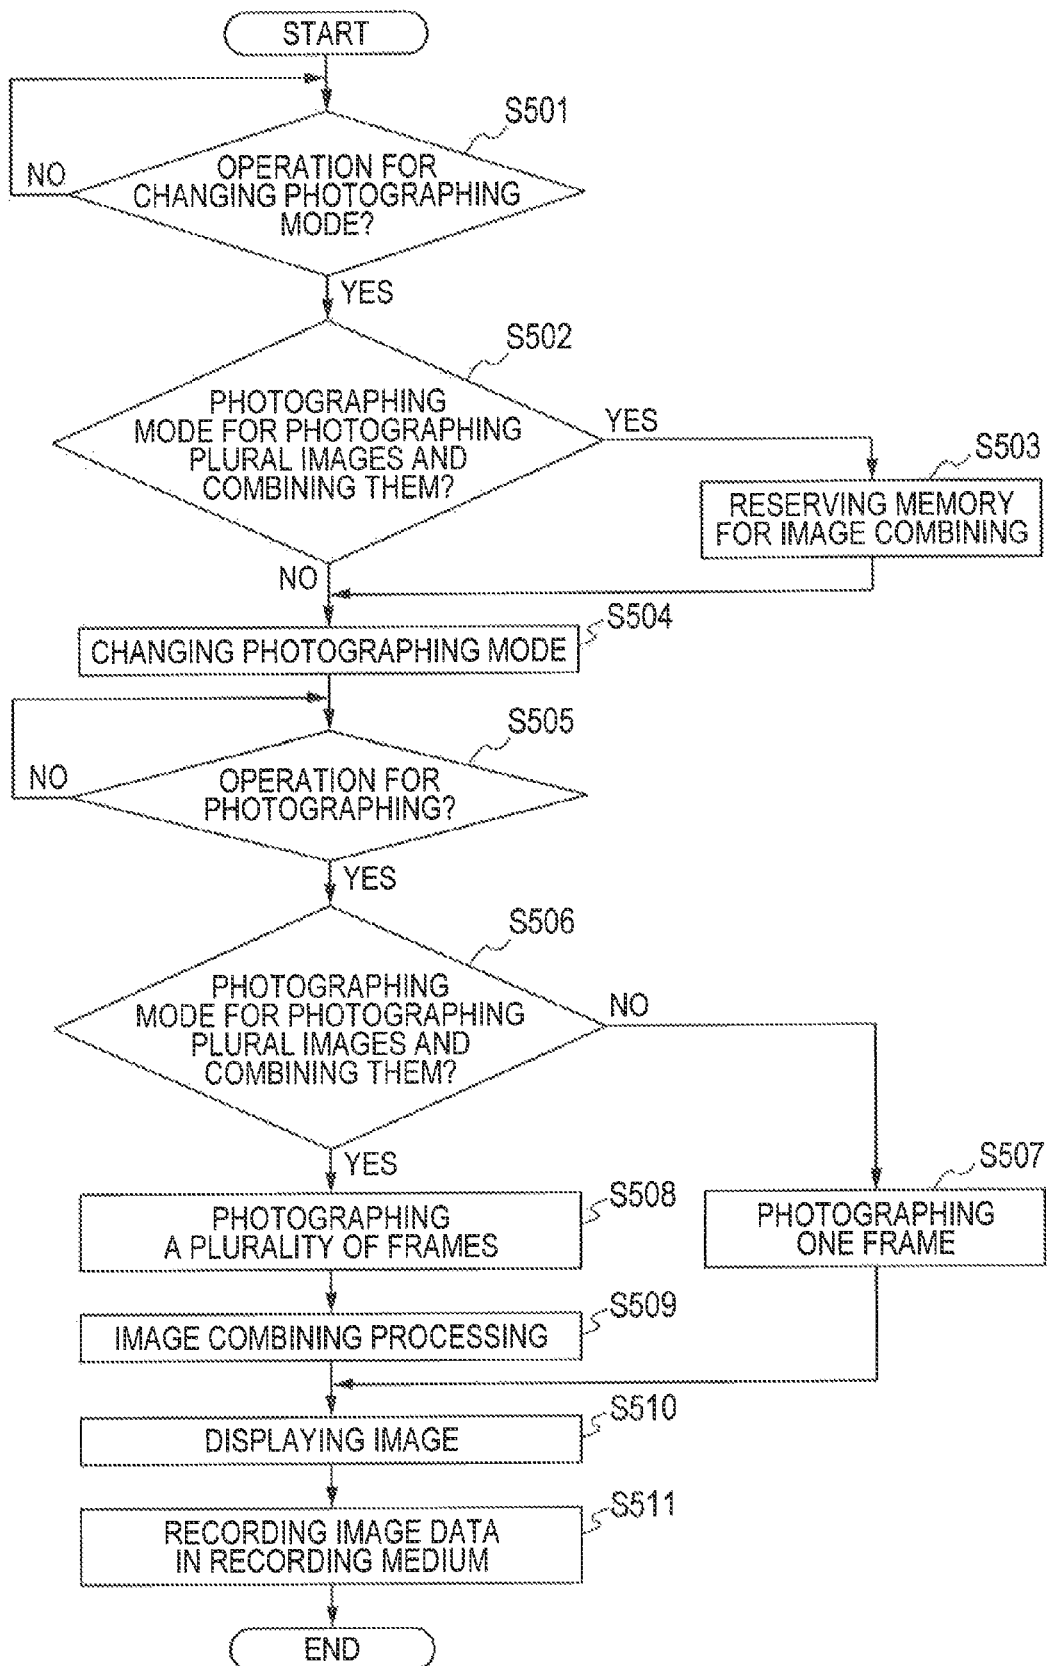


FIG. 6

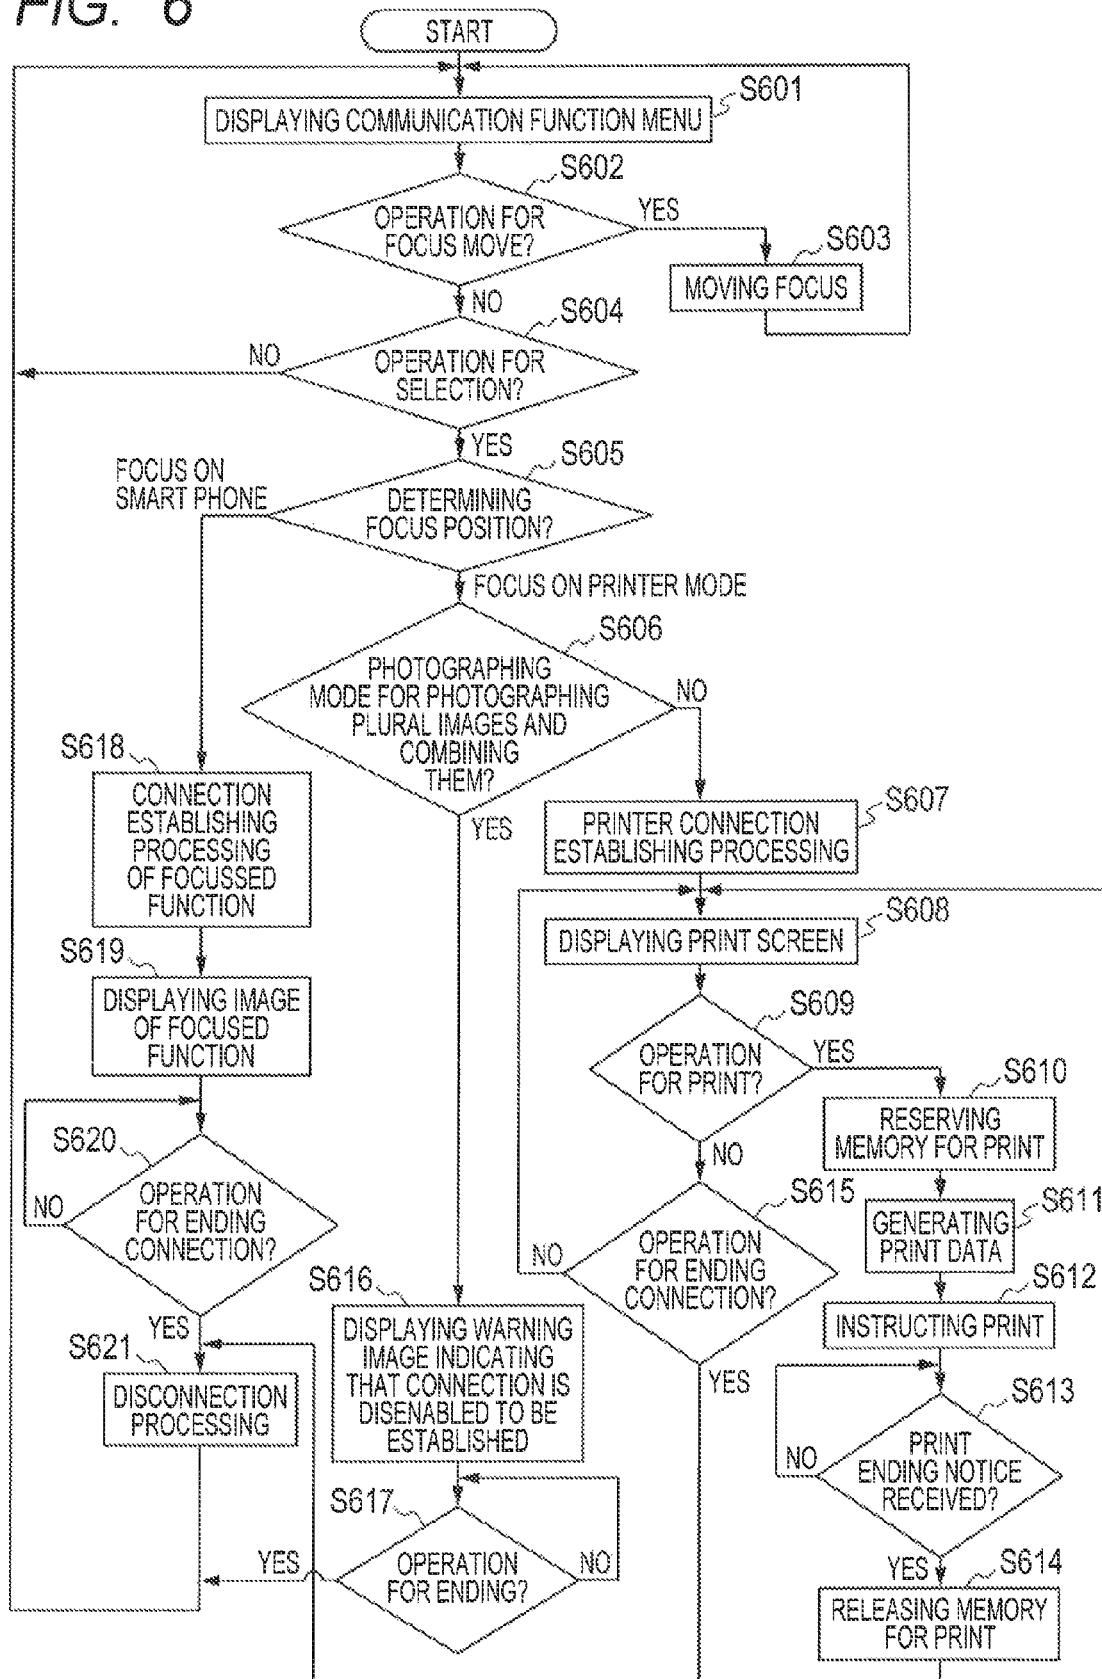

1

IMAGING APPARATUS, METHOD OF CONTROLLING IMAGING APPARATUS, AND PROGRAM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an imaging apparatus suitably used for restricting functions in accordance with a photographing mode, a method of controlling the imaging apparatus, and a program.

2. Description of the Related Art

Recently, there is widely known an imaging apparatus which is arranged such that in a case where the imaging apparatus is operating in a give specific photographing mode, functions other than those for a given specific photographing mode are restricted. For example, Japanese Patent Application Laid-Open No. 2001-320626 discloses an imaging apparatus which stops or restricts a plurality of functions that consume power, including a function for connection with an external device, while maintaining the minimum functions required for the imaging apparatus when a power-saving photographing mode is selected.

Restricting functions at the time of a specific photographing mode will produce effects such as suppressing power consumption and simplifying operations for the user. On the other hand, recently, there is known an imaging apparatus which has both a function of performing photographing in a photographing mode requiring a large memory capacity and a function for connection with an external device which also requires a large memory capacity. Such an imaging apparatus sometimes needs to perform exclusive control of the memory to activate one function while the other function is active.

For example, there is conceivable an imaging apparatus which has both a photographing function requiring a large memory capacity like a photographing mode for combining a plurality of images and a printing function using a printer, which requires a large memory capacity to generate print data. When using such an imaging apparatus, the apparatus needs to have a larger memory capacity to simultaneously activate the above two functions. In a system having a limited memory capacity, the two functions need to share the memory.

In addition, in an imaging apparatus using a system which shares a memory in this manner, a photo opportunity may occur after a memory for generating print data is reserved. When photographing at this timing in a photographing mode for combining a plurality of images, it is necessary, first of all, to perform processing such as releasing the reserved memory to generate print data. After this releasing processing is performed, a memory capacity for photographing is reserved. As described above, in some case, it takes much time to reserve a memory capacity for photographing, resulting in difficulty in photographing at the timing desired by the user.

SUMMARY OF THE INVENTION

An aspect of the present invention is to solve all or at least one of the above problems.

In addition, according to one aspect of the present invention, an imaging apparatus comprises an imaging unit, a memory configured to store image data generated by the imaging unit, a controller configured to control a plurality of photographing modes including at least a first photographing mode for photographing one image in accordance with one photographing instruction by using the imaging unit and a second photographing mode using a larger storage area of the

2

memory than in the first photographing mode, and a communication unit configured to communicate with an external apparatus by using data in the memory, wherein the communication unit is arranged to be disenabled to establish communication with the external apparatus in a case where the controller effects control in the second photographing mode.

Further features of the present invention will become apparent from the following description of exemplary embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate exemplary embodiments, features, and aspects of the invention and, together with the description, serve to explain the principles of the invention.

FIG. 1 is a view showing an example of the arrangement of a communication system according to an embodiment.

FIG. 2 is a block diagram showing an example of the internal arrangement of an imaging apparatus according to the embodiment.

FIG. 3 is a view showing an example of a UI (user interface) displayed when a communication function is selected in an ordinary photographing mode.

FIG. 4 is a view showing an example of the UI displayed when the communication function is selected in an HDR (High Dynamic Range) back-light correction mode.

FIG. 5 is a flowchart showing an example of a processing procedure to be performed when a photographing operation is performed after a changing operation is performed in a photographing mode according to the embodiment.

FIG. 6 is a flowchart showing an example of a processing procedure to be performed when the communication function is selected from a communication function menu by the user according to the embodiment.

DESCRIPTION OF THE EMBODIMENTS

Preferred Embodiments of the Present Invention will now be described in detail in accordance with the accompanying drawings.

FIG. 1 is a view showing an example of the arrangement of a communication system according to this embodiment.

As shown in FIG. 1, an imaging apparatus 100 according to this embodiment can be connected to a printer 200 via a network 300, and can be further connected to an information processing apparatus 400 via a network 500. The information processing apparatus 400 is a personal computer, portable telephone, smart phone, so-called tablet device, or the like.

The imaging apparatus 100 according to this embodiment has a function capable of selecting whether to establish connection with the printer 200 via the network 300 or establish connection with the information processing apparatus 400 via the network 500. The embodiment will exemplify a case in which wireless LANs are used as the networks 300 and 500. Note that the networks which can be used as the networks 300 and 500 are not limited to wireless LANs. For example, a network using an infrared communication or a network using BlueTooth® may be used as the network 300. Alternatively, other types of wired networks may be used.

FIG. 2 is a block diagram showing an example of the internal arrangement of the imaging apparatus 100 according to this embodiment.

Referring to FIG. 2, a control unit 101 controls the respective units of the imaging apparatus 100 in accordance with input signals and programs (to be described later). Note that

the overall imaging apparatus **100** may be controlled by assigning parts of processing to a plurality of pieces of hardware instead of making the control unit **101** control the overall imaging apparatus **100**. The imaging apparatus **100** in the embodiment can acquire image data by making the control unit **101** control a photographing unit **102** (to be described later).

The control unit **101** also has a display control function of making a display unit **106** display a menu screen in accordance with an operation of an operation unit **105**. The menu screen is a screen to be displayed on the display unit **106** by the control unit **101** when the user presses a menu button on the operation unit **105** (to be described later). An ordinary menu screen displays a menu containing photographing mode options, size options of image data to be acquired, communication function options, and brightness options of the display unit **106**, options of languages to be displayed, and the like. The user can change and execute such options by operating the operation unit **105**.

The photographing unit **102** performs image pickup processing. The image pickup processing is the processing of converting the object light image formed by the lens included in the photographing unit **102** into an electrical signal, performing noise reduction processing and the like to the electrical signal and outputting digital data as image data. The image data generated by image pickup is stored in a buffer memory as a work memory **104**. The control unit **101** then performs a predetermined computation for the data. The resultant data is recorded in a recording medium **110**.

A nonvolatile memory **103** is a nonvolatile memory capable of electrically erasing and recoding data, and stores programs and the like (to be described later) to be executed by the control unit **101**. The work memory **104** is a buffer memory which temporarily holds the image data generated by the photographing unit **102** or a memory functioning as an image display memory for the display unit **106**. In addition, the work memory **104** functions as a buffer memory which temporarily holds data when exchanging it with the printer **200** or the information processing apparatus **400** via a communication unit **109** and a work area for the control unit **101**.

The user operates the operation unit **105** to issue an instruction to operate the imaging apparatus **100**. The operation unit **105** includes, for example, a power button for issuing an instruction to turn on/off the power supply of the imaging apparatus **100** and a release switch for accepting an instruction to perform image pickup processing. The operation unit **105** also includes a menu button for displaying the above menu screen and operation members such as a four-way operational key and a touch panel which accept operations during the display of the screen.

The display unit **106** displays a live view image at the time of image pickup, an image generated by an imaging instruction, characters for an interactive operation, and the like. In this embodiment, the control unit **101** controls the display unit **106** to continuously display the image data output from the photographing unit **102** as a live view image while sequentially updating it. With this operation, images associated with the image data generated by the photographing unit **102** are sequentially displayed on the display unit **106** in real time. Note that the imaging apparatus **100** need not be equipped with the display unit **106**. The imaging apparatus **100** may be capable of being connected to the display unit **106** such as a display device and have at least a display control function which controls the display of the display unit **106**.

The communication unit **109** is a connection unit for communicating with external devices. The imaging apparatus **100** according to this embodiment can exchange data with the

printer **200** and the information processing apparatus **400** via the communication unit **109**. In this embodiment, the communication unit **109** is a wireless communication unit. The control unit **101** can wirelessly communicate with the printer **200** and the information processing apparatus **400** via an antenna. Note that the communication unit **109** is also used when the imaging apparatus **100** is connected to, for example, a network such as the Internet.

The control unit **101** performs recording processing to record the image data output from the photographing unit **102** in the recording medium **110**. Note that the recording medium **110** may be a medium detachable from the imaging apparatus **100** or a medium built in the imaging apparatus **100**.

The photographing modes of the imaging apparatus **100** will be described next. The imaging apparatus **100** according to this embodiment can perform photographing in a plurality of photographing modes such as a manual photographing mode and an automatic photographing mode. Of these modes, photographing modes for photographing a plurality of images include a handheld night scene mode, an HDR back-light correction mode, a multi-shot noise reduction mode, a multi-exposure mode, and a panorama combining mode for generating a horizontal or vertical image. This embodiment will exemplify the HDR back-light correction mode as a photographing mode for photographing a plurality of images. Assume that in an ordinary photographing mode, one image is generated by one photographing operation and recorded in the recording medium **110**.

The HDR back-light correction mode is a mode for continuously photographing three images with different brightness levels by one photographing operation and generating one image having wide-range gradation with a suppressed blocked up shadow by combining the three photographed images, and recording the generated image in the recording medium **110**. As described above, the HDR back-light correction mode is a mode requiring to reserve, in the work memory **104**, a work area having a large capacity to combine images. This mode requires reserving a large memory capacity to hold a combined image as well as a plurality of photographed images.

The communication functions of the imaging apparatus **100** will be described next. The imaging apparatus **100** according to this embodiment has a printer mode for connection with the printer **200** via the network **300** and a smart phone mode for connection with the information processing apparatus **400** via the network **500**. In a case where connected to the printer **200** in the printer mode, the imaging apparatus **100** generates print data from the image data recorded in the recording medium **110** in accordance with the PictBridge standard, and transmits the print data to the printer **200** as a transmission destination. The printer **200** has a print function based on the PictBridge standard, and can print the data received from the imaging apparatus **100** via the network **300**. When connected to the information processing apparatus **400** in the smart phone mode, the information processing apparatus **400** can acquire the image data recorded in the recording medium **110** in accordance with the PTP protocol.

As described above, unlike in the smart phone mode, in the printer mode, it is necessary to reserve a work area with a large capacity in the work memory **104** to generate print data. In addition, in the work memory **104**, a storage area reserved to combine images in the HDR back-light correction mode and a storage area reserved to generate print data in the printer mode are an overlapping common area. Although this embodiment has exemplified the printer mode as an example using a larger memory than in the ordinary communication mode, the embodiment can be applied to any mode other than

5

the printer mode as long as the mode uses a larger memory capacity than the ordinary communication mode.

An example of displaying a selection screen for the communication functions of the imaging apparatus **100** on the display unit **106** will be described next. FIG. **3** is a view showing an example of the UI displayed on the display unit **106** when the user operates the operation unit **105** of the imaging apparatus **100** in an ordinary photographing mode such as the manual photographing mode or the automatic photographing mode.

A screen **301** shown in FIG. **3** is a screen to be displayed on the display unit **106** by the control unit **101** when the user depresses the menu button of the operation unit **105**. When the communication function is selected according to a user operation while the screen **301** is displayed, the current screen changes to a communication function menu screen **302**. On the communication function menu screen **302**, the user selects the smart phone mode or printer mode as a communication mode by operating the operation unit **105**.

When the user selects the smart phone mode or printer mode, the control unit **101** controls the communication unit **109** to perform a connection operation to the smart phone or printer in accordance with the connection destination selected by the user. At this time, the control unit **101** effects control to display a smart phone connection establishing screen **303** or a printer connection establishing screen **304** on the display unit **106** in accordance with the connection destination.

FIG. **4** is a view showing an example of the UI displayed on the display unit **106** when the user operates the operation unit **105** of the imaging apparatus **100** while the HDR back-light correction mode is selected as a photographing mode.

Like the screen **301** shown in FIG. **3**, a screen **401** shown in FIG. **4** is a screen to be displayed on the display unit **106** by the control unit **101** when the user presses the menu button of the operation unit **105**. When the communication function is selected according to a user operation while the screen **401** is displayed, the current screen changes to a communication function menu screen **402**. On the communication function menu screen **402**, like on the communication function menu screen **302** shown in FIG. **3**, the user selects the smart phone mode or printer mode as a communication mode by operating the operation unit **105**.

In a case where the user selects the smart phone mode while the communication function menu screen **402** is displayed, the control unit **101** controls the communication unit **109** to perform a connection operation to the information processing apparatus **400**. The control unit **101** then effects control to display a smart phone connection establishing screen **403** on the display unit **106**. In a case where the user selects the printer mode while the communication function menu screen **402** is displayed, the control unit **101** displays a printer connection disabled screen **404** on the display unit **106** to inhibit connection with the printer **200**.

As shown in FIG. **4**, the memory area required to store images photographed in the HDR back-light correction mode and the combined image is common to the memory area required to store print data when a print instruction is issued, and hence exclusive control is performed. This obviates the necessity to perform the processing of releasing the memory area reserved to save print data at a photo opportunity in the HDR back-light correction mode and hence prevents the user from losing a photo opportunity.

A control method using the imaging apparatus **100** will be described next with reference to FIGS. **5** and **6**. FIG. **5** is a flowchart showing an example of a processing procedure to be performed in a case where a photographing operation is

6

performed after a photographing mode is changed. Note that the control unit **101** effects control to perform each processing shown in FIG. **5**.

First of all, in step **S501**, the operation unit **105** stands by until the reception of an instruction to change the photographing mode from the operation unit **105**. When an instruction to change the photographing mode is issued, the process advances to step **S502**.

In step **S502**, it is determined whether the photographing mode after the change is a photographing mode for photographing a plurality of images and combining them, such as the HDR back-light correction mode. The photographing mode determined in this determination is the above photographing mode. If this determination result indicates that the determined mode is the photographing mode for photographing a plurality of images and combining them, the process advances to step **S503**. If the determined mode is the ordinary photographing mode other than the above mode, the process advances to step **S504**.

In step **S503**, a work memory area necessary to combine images is reserved in the work memory **104**, and the process advances to step **S504**. The work memory area reserved in this case is common to a memory area for the generation of print data (to be described later). Note that if a memory area to be reserved is being used by the processing performed by another function of the imaging apparatus **100**, the memory area is released upon interruption of the processing, and memory area reservation processing is performed. In step **S504**, the current mode is changed to the instructed photographing mode.

In step **S505**, the operation unit **105** stands by until the reception of a photographing instruction from the operation unit **105**. Upon reception of a photographing instruction from the operation unit **105**, the process advances to step **S506**. It is determined in step **S506** whether the current photographing mode is a photographing mode for photographing a plurality of images and combining them, such as the HDR back-light correction mode. If it is determined that the current photographing mode is a photographing mode for photographing a plurality of images and combining them, the process advances to step **S508**. If the current photographing mode is an ordinary photographing mode other than the above mode, the process advances to step **S507**. In step **S507**, the photographing unit **102** performs image pickup processing once, and the process advances to step **S510**. Assume that when ordinary continuous photographing is to be performed, image pickup processing is performed a corresponding number of times of the continuous photographing.

In step **S508**, the photographing unit **102** performs image pickup processing the number of times corresponding to a photographing mode, and the process advances to step **S509**. Note that image pickup processing is performed three times in the HDR back-light correction mode. In step **S509**, one image is generated by combining a plurality of images, obtained by image pickup processing, using the work memory area reserved in step **S503**. The process then advances to step **S510**.

In step **S510**, the control unit **101** displays, on the display unit **106**, the image obtained by image pickup processing or combining processing. The process then advances to step **S511**. In step **S511**, the generated image is written as image data in the recording medium **110**.

FIG. **6** is a flowchart showing an example of a processing procedure to be performed when the user selects a communication function from the communication function menu. Note that each processing shown in FIG. **6** is performed under the control of the control unit **101**.

First of all, in step **S601**, the display unit **106** displays the communication function menu shown in FIG. **3** or **4**. On this communication function menu screen, one of the smart phone mode and the printer mode is focused. In this state, it is possible to switch the focus position between them by operating the operation unit **105**.

Subsequently, in step **S602**, it is determined whether the user has performed an operation to move the focus between the smart phone mode and the printer mode. If this determination result indicates that the user performs an operation to move the focus, the process advances to step **S603**. If the user does not perform such an operation, the process advances to step **S604**. In step **S603**, the focus is moved between the smart phone mode and the printer mode to update the screen displayed on the display unit **106**. The process then returns to step **S601**.

In step **S604**, it is determined whether the user performs an operation to select the communication mode focused on the screen. If the determination result indicates that the user performs an operation to select the communication mode, the process advances to step **S605**. Otherwise, the process returns to step **S601**. Subsequently, it is determined in step **S605** whether the selected mode is the smart phone mode or printer mode. If this determination result indicates that the printer mode is selected, the process advances to step **S606**. If the smart phone mode is selected, the process advances to step **S618**.

In step **S606**, it is determined whether the current photographing mode is a photographing mode for photographing a plurality of images and combining them, such as the HDR back-light correction mode. If this determination result indicates that the current photographing mode is an ordinary photographing mode other than the above photographing mode, the process advances to step **S607**. If the current photographing mode is a photographing mode for photographing a plurality of images and combining them, the process advances to step **S616**.

In step **S607**, the communication unit **109** is controlled to establish connection with the printer **200**. At this time, the display unit **106** displays the printer connection establishing screen **304** like that shown in FIG. **3**. In step **S608**, the image selection screen for issuing a print instruction is displayed on the display unit **106**.

Subsequently, it is determined in step **S609** whether the user performs an operation to issue a print instruction upon selecting an image with the operation unit **105** while a screen for selecting an image to be subjected to printing is displayed. If this determination result indicates that the user performs an operation to issue a print instruction, the process advances to step **S610**. If the user does not perform such an operation, the process advances to step **S615**.

In step **S610**, a memory area for an operation to combine print data is reserved in the work memory **104**, and the process advances to step **S611**. The memory area for an operation reserved in this case is common to a memory area for image combining reserved in step **S503** described above. Subsequently, in step **S611**, print data to be transmitted to the connected printer **200** is generated in the memory area reserved in step **S610**, and the process advances to step **S612**.

In step **S612**, a print start instruction is transmitted, together with the print data generated in step **S611**, to the connected printer **200** via the communication unit **109**. In step **S613**, the control unit **101** stands by until the reception of a print ending notice from the printer **200**. Note that while the control unit **101** stands by, a screen indicating that the display unit **106** is printing is displayed. Upon receiving a print ending notice from the printer **200**, the control unit **101** releases

in step **S614** the work memory area reserved in step **S610**. The process then returns to step **S608**.

In step **S615**, it is determined whether the user performs an operation to end the connection. If this determination result indicates that the user performs an operation to end the connection, the process advances to step **S621**. If the user does not perform such an operation, the process returns to step **S608**.

On the other hand, in step **S616**, the printer connection disabled screen **404** like that shown in FIG. **4** is displayed on the display unit **106**. In step **S617**, the control unit **101** stands by until the user performs an ending operation by using the operation unit **105**. If the user performs an ending operation by using the operation unit **105**, the process returns to step **S601**.

On the other hand, in step **S618**, the communication unit **109** is controlled to establish connection with the information processing apparatus **400**. At this time, a smart phone connection establishing screen like that shown in FIG. **3** or **4** is displayed on the display unit **106**. In step **S619**, a screen after the completion of connection with the smart phone is displayed on the display unit **106**. During this period, the information processing apparatus **400** can exchange data with the imaging apparatus **100** so as to acquire, for example, image data recorded in the recording medium **110**.

In this manner, as long as transmission takes place for image transfer, the digital camera of the invention can establish connection to an external apparatus even in any one of a photographing mode which requires larger memory area than usual and a photographing mode which photographs an image of one frame by an imaging unit in accordance with one photographing instruction.

However, in a case where the digital camera establishes the connection for print to the external apparatus, there exist a case where the connection to the external apparatus can be established and a case where such connection cannot be established, depending on the photographing mode. In the present embodiment, the digital camera is arranged not to be able to establish the connection for print to the external apparatus in a case of the photographing mode which requires larger memory area than usual, while even in the case of the photographing mode which requires larger memory area than usual, if the connection to the external apparatus is not for print but for image transfer, the digital camera is allowed to establish the connection to the external apparatus.

In step **S620**, the control unit **101** stands by until the reception of a connection ending operation from the operation unit **105**. Upon receiving a connection ending operation, the control unit **101** performs disconnection processing with respect to the device under communication via the communication unit **109** in step **S621**. After the disconnection, the process returns to step **S601**.

As has been described above, this embodiment is based on the assumption that both the photographing mode using a large memory area, such as the HDR back-light correction mode, and the communication mode using a large memory area, such as the printer mode, reserve a common memory area. In this case, while the communication mode using a large memory area is selected, control is effected to inhibit connection with an external device to which a large memory area is required for connection with the printer or the like. This can prevent a situation in which the user loses a photo opportunity in a photographing mode using a large memory area, such as the HDR back-light correction mode.

Aspects of the present invention can also be realized by a computer of a system or apparatus (or devices such as a CPU or MPU) that reads out and executes a program recorded on a

memory device to perform the functions of the above-described embodiment(s), and by a method, the steps of which are performed by a computer of a system or apparatus by, for example, reading out and executing a program recorded on a memory device to perform the functions of the above-described embodiment(s). For this purpose, the program is provided to the computer for example via a network or from a recording medium of various types serving as the memory device (e.g., computer-readable medium).

While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures and functions.

This application claims the benefit of Japanese Patent Application No. 2013-146869, filed on Jul. 12, 2013, which is hereby incorporated by reference herein in its entirety.

What is claimed is:

1. An imaging apparatus comprising:
an imaging unit;
a memory configured to store image data generated by the imaging unit;
a controller configured to execute a plurality of photographing modes including at least a first photographing mode that uses a storage area of the memory for photographing one image in accordance with one photographing instruction using the imaging unit and a second photographing mode that uses a larger storage area of the memory than the first photographing mode; and
a communication unit configured to communicate with an external apparatus by using data in the memory, wherein the communication unit is disabled to establish communication with the external apparatus when the controller executes the second photographing mode.
2. An apparatus according to claim 1, wherein the memory is used to store an image obtained in the second photographing mode and store data for communication with the external apparatus.

3. An apparatus according to claim 1, further comprising a display control unit configured to display, on a display unit, information indicating that the communication unit is disabled to establish connection with the external apparatus when the controller executes the second photographing mode.

4. An apparatus according to claim 1, wherein the second photographing mode is a photographing mode for generating a plurality of image data by using the imaging unit and combining the generated plurality of image data.

5. An apparatus according to claim 1, wherein the communication unit is arranged to establish connection with the external apparatus when the controller executes the first photographing mode.

6. An apparatus according to claim 1, wherein the communication unit communicates with a printing apparatus which is a transmission destination of print data generated by using a storage area of the memory, as the external apparatus.

7. A method of controlling an imaging apparatus including an imaging unit and a memory configured to store image data generated by the imaging unit, the method comprising:

of executing a plurality of photographing modes including at least a first photographing mode that uses a storage area of the memory for photographing one image in accordance with one photographing instruction using the imaging unit and a second photographing mode that uses a larger storage area of the memory than the first photographing mode; and
communicating with an external apparatus by using data in the memory, wherein establishing communication with the external apparatus is disabled when executing the second photographing mode.

8. A non-transitory computer-readable storage medium storing a program for causing a computer to execute the control method defined in claim 7.

* * * * *